

Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813


customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION

Part No.

8089CBOS6

**Boston Sweat P-Trap** 

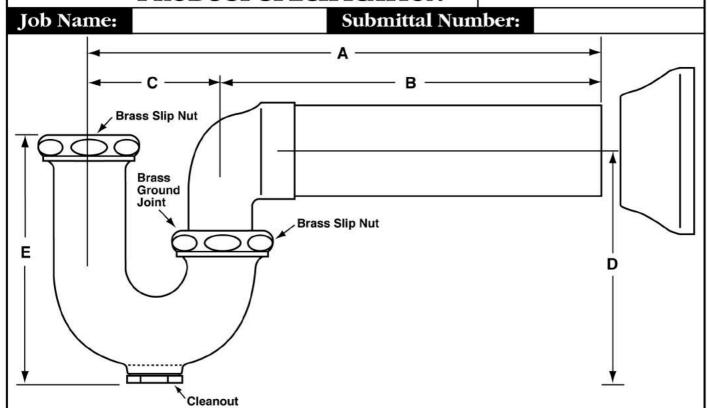

ROUGHING MEASUREMENTS									
NO.						_			
	INLET	OUTLET	A	В		D	E		
8089CBOS6	1-1/2"	1-1/2" w/6" Sweat Extension	10"	7"	3"	4-1/2"	5"		

Note: Minimum seal 2"

See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body with cleanout, 17 gauge seamless tubular sweat extension, cast brass ground joint elbow, and cast brass slip nuts. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.





Cheshire, Connecticut 06410


(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

### Part No.

8089CBOS12

**Boston Sweat P-Trap** 

### PRODUCT SPECIFICATION

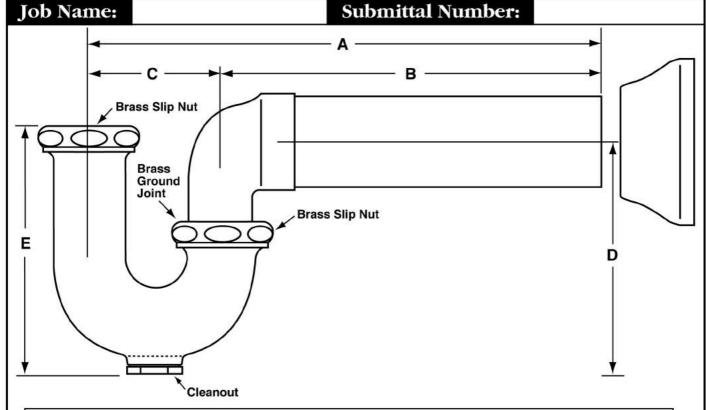

ROUGHING MEASUREMENTS									
NO.	TRAP DIMENSIONS			9					
NO.	INLET	OUTLET	A	В	C	D	E		
8089CBOS12	1-1/2"	1-1/2" w/12" Sweat Extension	16"	13"	3"	4-1/2"	5"		

Note: Minimum seal 2"

See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body with cleanout, 17 gauge seamless tubular sweat extension, cast brass ground joint elbow, and cast brass slip nuts. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.





60 Grandview Court Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813

 $customerservice@mcguiremfg.com \\ mcguiremfg.com$ 


## PRODUCT SPECIFICATION

Part No.

8090CBOS6

**Boston Sweat P-Trap** 

## Job Name: Submittal Number:

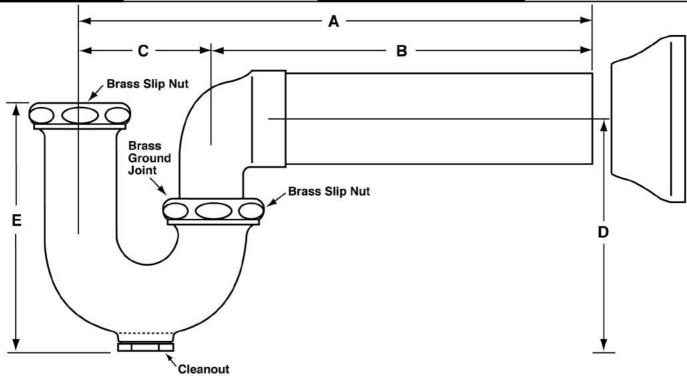

ROUGHING MEASUREMENTS									
NO.	TRAP DIMENSIONS								
	INLET	OUTLET	A	В		D	E		
8090CBOS6	1-1/4"	1-1/2" w/6" Sweat Extension	10"	7"	3"	4-1/2"	5"		

Note: Minimum seal 2"

See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body with cleanout, 17 gauge seamless tubular sweat extension, cast brass ground joint elbow, and cast brass slip nuts. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.





Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com


DDODICT SDECTEL ATION

Part No.

8090CBOS12

**Boston Sweat P-Trap** 

## PRODUCT SPECIFICATION D

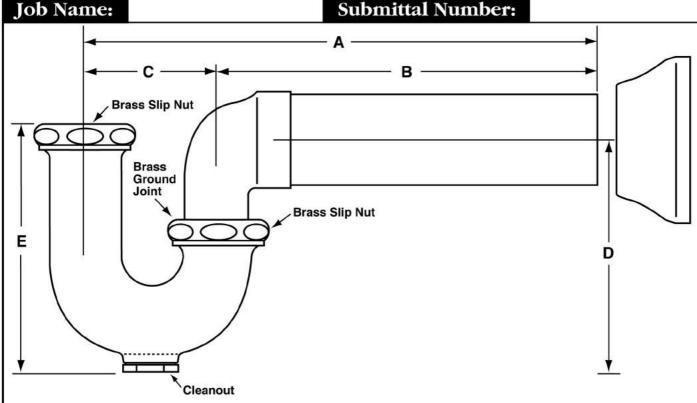

ROUGHING MEASUREMENTS									
NO.				_		_			
	INLET	OUTLET	A	В	C	D	E		
8090CBOS12	1-1/4"	1-1/2" w/12" Sweat Extension	16"	13"	3"	4-1/2"	5"		

Note: Minimum seal 2"

See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body with cleanout, 17 gauge seamless tubular sweat extension, cast brass ground joint elbow, and cast brass slip nuts. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

8872C


Part No.

Cast Body P-Trap With or Without Cleanout

#### **PRODUCT SPECIFICATION**

Job Name:

**Submittal Number:** 

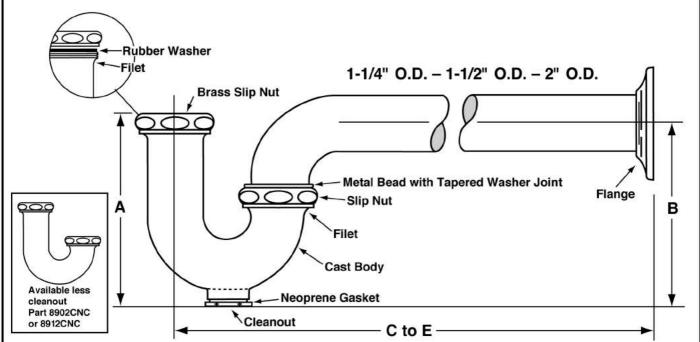

#### PROFESSIONAL LINE

ROUGHING MEASUREMENTS								
NO.	TRAP DIN			0 t - F				
	INLET	OUTLET	Α	В	C to E			
8872C	1-1/4"	1-1/4"	4-1/2"	4-1/4"	11-1/2"			

- Rated Operating Temperature: 40-140ºF
- Note: 180°F max. during temporary high-temperature system flush

FED SPEC W.W.P. 541 **CAST BRASS P TRAP** MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**8872CBECO** 

Cast Body P-Trap With or Without Cleanout

Job Name:

### **Submittal Number:**

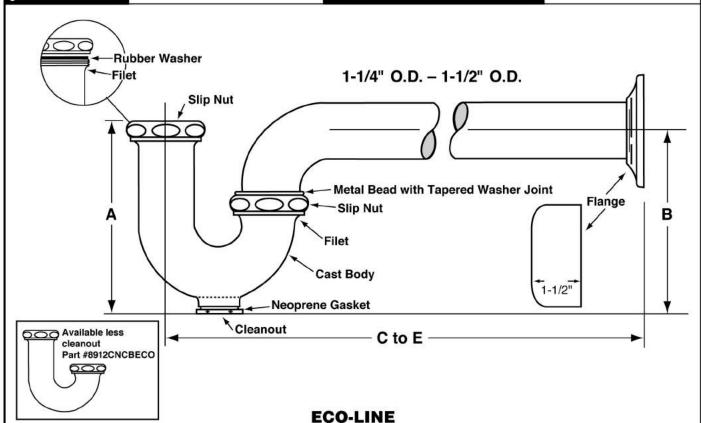

ROUGHING MEASUREMENTS									
MODEL NO.	TRAP DIMENSIONS			==					
	INLET	OUTLET	7 A	В	CtoE	FLANGE	SLIP NUT		
8872CBECO	1-1/4"	1-1/4"	4-1/2"	4-1/2"	11"	Box	Brass		

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8902C

Cast Body P-Trap With or Without Cleanout

#### Job Name:

### **Submittal Number:**

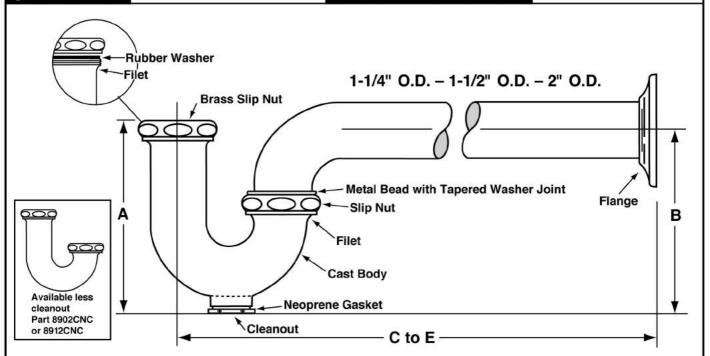

#### PROFESSIONAL LINE

	ROUGHING MEASUREMENTS								
No.	TRAP DIM			0 to F					
NO.	INLET	OUTLET	A	В	C to E				
8902 C	1-1/4"	1-1/2"	5"	5-1/2"	11-1/2"				

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8902CNC

Cast Body P-Trap
With or Without Cleanout

#### Job Name:

#### **Submittal Number:**

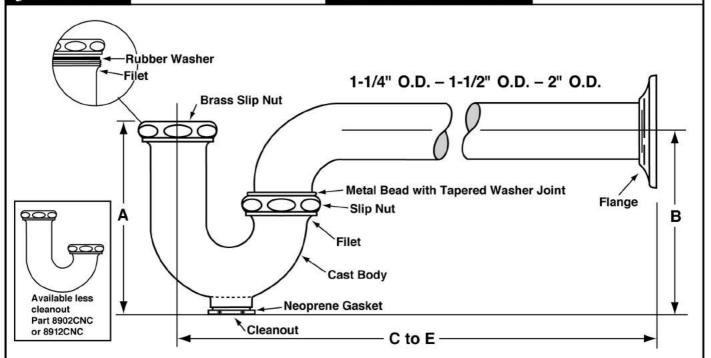

#### PROFESSIONAL LINE

ROUGHING MEASUREMENTS								
NO.	TRAP DIN	MENSIONS			04- 5			
	INLET	OUTLET	A	В	C to E			
8902CNC	1-1/4"	1-1/2"	4-5/8"	4-3/4"	11-1/2"			

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## **PRODUCT SPECIFICATION**


Part No.

8903C

Cast Body P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

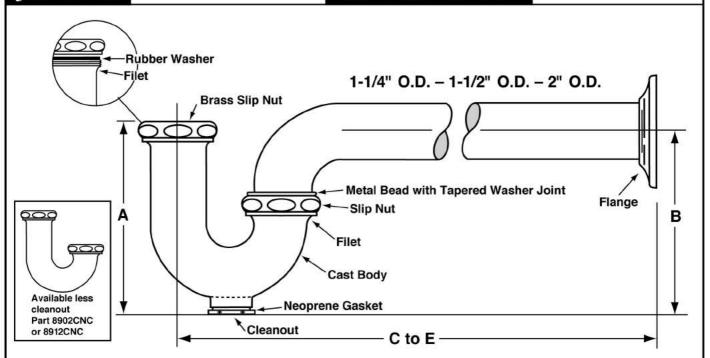

#### PROFESSIONAL LINE

	ROU	GHING MEASUF	REMENTS		250
NO.	TRAP DIN			04- 5	
	INLET	OUTLET	A	В	C to E
8903C	1-1/2"	2"	5"	6"	13-3/4"

CAST BRASS P TRAP MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8904C

Cast Body P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

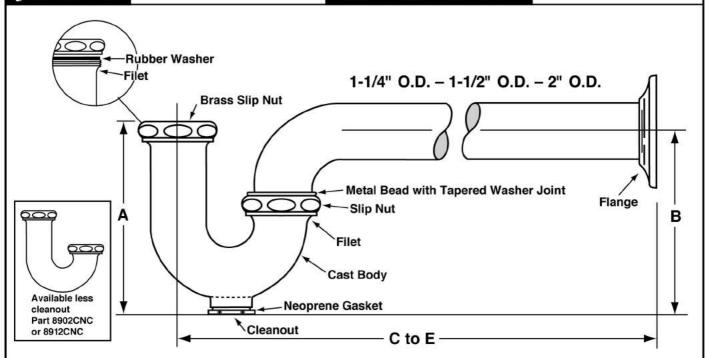

#### **PROFESSIONAL LINE**

	ROU	GHING MEASUF	REMENTS		
NO.	TRAP DIN			0F	
	INLET	OUTLET	A	В	C to E
8904C	2"	2"	5"	6"	13-3/4"

FED SPEC W.W.P. 541 CAST BRASS P TRAP MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## Specifications:

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**8904CBECO** 

Cast Body P-Trap With or Without Cleanout

#### Job Name:

### **Submittal Number:**

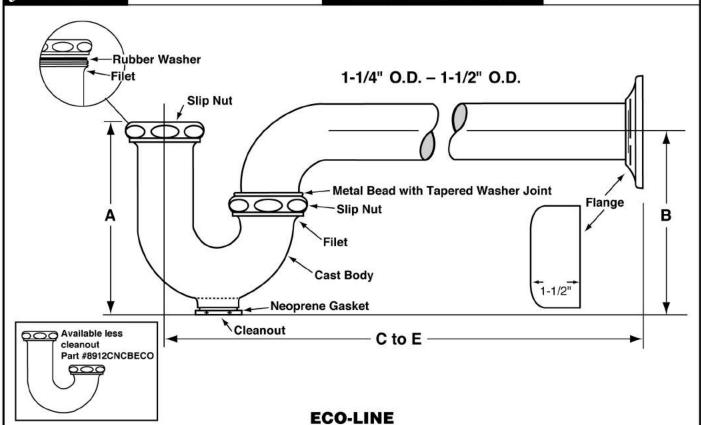

ROUGHING MEASUREMENTS									
MODEL NO.	TRAP DIMENSIONS			===					
	INLET	OUTLET	A	В	CtoE	FLANGE	SLIP NUT		
8904CBECO	1-1/2", 2"	2"	5"	6"	13-1/2"	Box	Brass		

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8912C

Cast Body P-Trap
With or Without Cleanout

#### Job Name:

### **Submittal Number:**

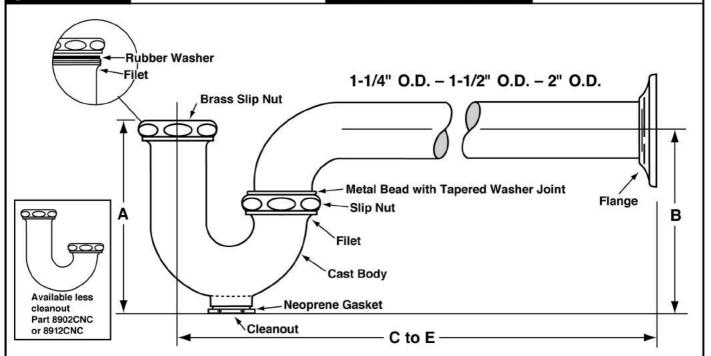

#### PROFESSIONAL LINE

ROUGHING MEASUREMENTS								
NO.	TRAP DIN			0 t - F				
	INLET	OUTLET	A	В	C to E			
8912C	1-1/2"	1-1/2"	5"	5-1/2"	11-1/2"			

- Rated Operating Temperature: 40-140°F
- Note: 180°F max. during temporary high-temperature system flush

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8912C18BECO

Cast Body P-Trap With or Without Cleanout

Job Name:

### **Submittal Number:**

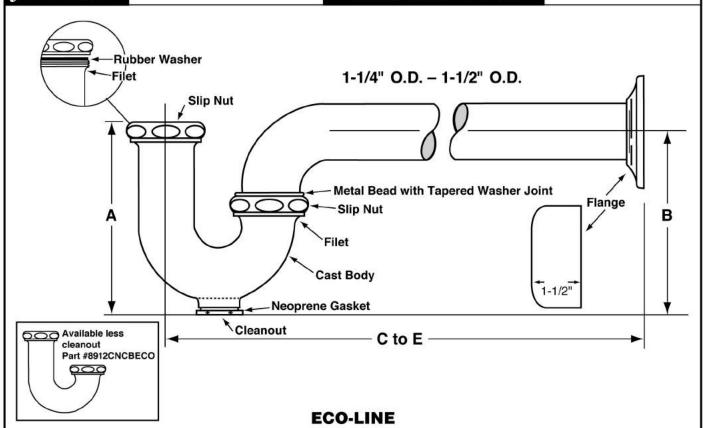

#### **ROUGHING MEASUREMENTS** TRAP DIMENSIONS FLANGE **SLIP NUT** MODEL NO. В C to E INLET OUTLET 5" 5" 18" 1-1/2", 1-1/4" 1-1/2" 8912C18BECO Box **Brass**

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**8912CBECO** 

Cast Body P-Trap With or Without Cleanout

#### Job Name:

### **Submittal Number:**

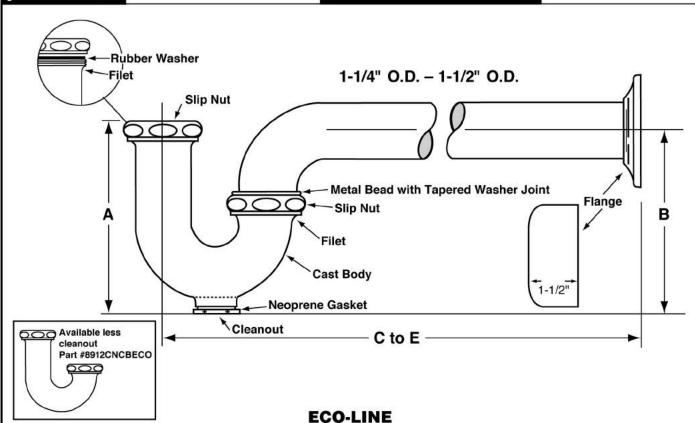

ROUGHING MEASUREMENTS									
	TRAP DIMENSIONS					20 25022			
MODEL NO.	INLET	OUTLET	A	В	C to E	FLANGE	SLIP NUT		
8912CBECO	1-1/2", 1-1/4"	1-1/2"	5"	5"	12"	Box	Brass		

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## **PRODUCT SPECIFICATION**


Part No.

8912CNC

Cast Body P-Trap
With or Without Cleanout

Job Name:

**Submittal Number:** 

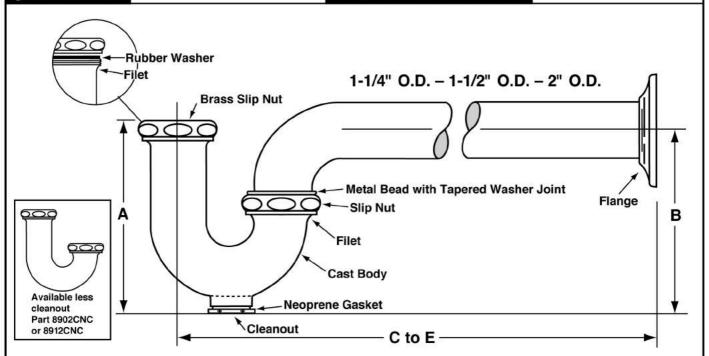

#### PROFESSIONAL LINE

	ROU	GHING MEASU	REMENTS	) 	
NO.	TRAP DIN	TRAP DIMENSIONS			
	INLET	OUTLET	A	В	C to E
8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8"	11-1/2"

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.

P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

8912CNCBECO

Cast Body P-Trap With or Without Cleanout

### Job Name:

### **Submittal Number:**

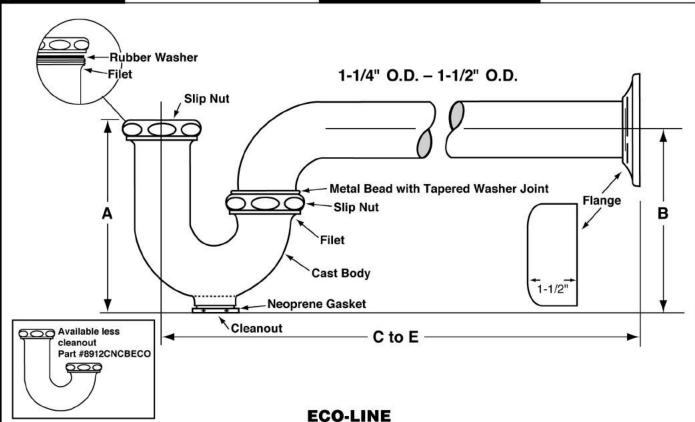

#### **ROUGHING MEASUREMENTS** TRAP DIMENSIONS FLANGE **SLIP NUT** MODEL NO. В C to E INLET OUTLET 1-1/2", 1-1/4" 12" 8912CNCBECO 1-1/2" 4-3/4" 4-1/2" Box **Brass**

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

 $customerservice @mcguiremfg.com \\ mcguiremfg.com$ 

#### PRODUCT SPECIFICATION


Part No.

B8872

Cast Body P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

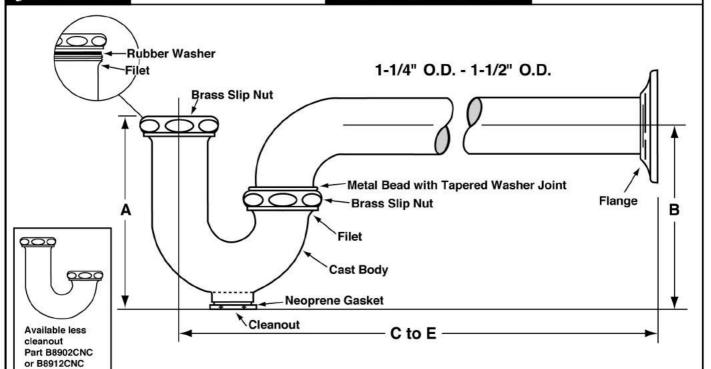

#### STOCK LINE

	ROUGHING MEASUREMENTS							
	TRAP DII		_					
NO.	INLET	OUTLET	_ A	В	C to E			
B8872	1-1/4"	1-1/4"	4-1/2"	4-1/2"	10-1/2"			

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

### PRODUCT SPECIFICATION


Part No.

**B8872C** 

Cast Body P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

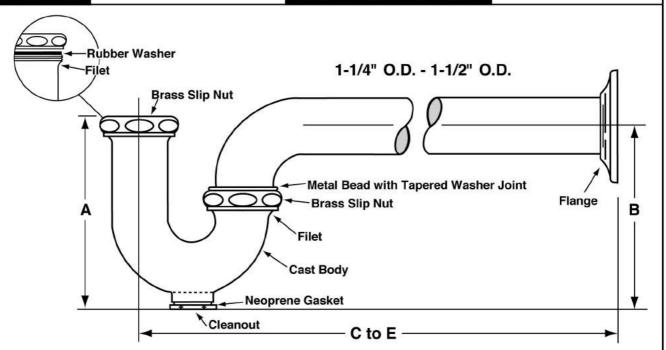

#### STOCK LINE

	ROUGHING MEASUREMENTS							
	TRAP DI			10-100				
NO.	INLET	OUTLET	_ A	В	C to E			
B8872C	1-1/4"	1-1/4"	4-1/2"	4-1/2"	10-1/2"			

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813


 $customerservice@mcguiremfg.com \\ mcguiremfg.com$ 

Part No.

B8902

Cast Body P-Trap With or Without Cleanout

#### PRODUCT SPECIFICATION

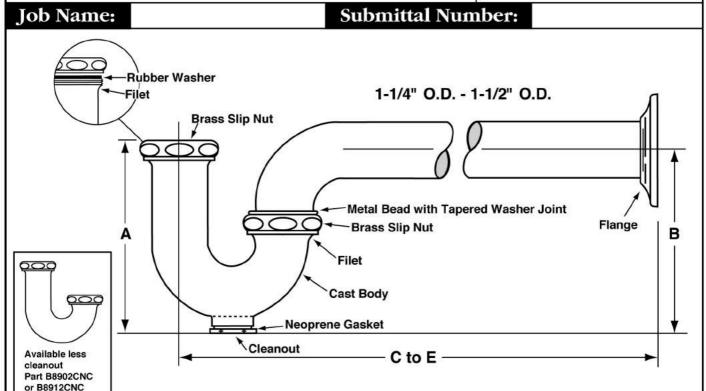

#### STOCK LINE

	ROUGHING MEASUREMENTS							
	TRAP DI	o 0 <b>=</b> 00						
NO.	INLET	OUTLET	A	В	C to E			
B8902	1-1/4"	1-1/2"	5"	5-1/2"	10-1/2"			

<u>1</u>

Note: Prefix "C" indicates die cast slip nuts.

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

### PRODUCT SPECIFICATION


Part No.

**B8902C** 

Cast Body P-Trap With or Without Cleanout

#### Job Name:

## **Submittal Number:**

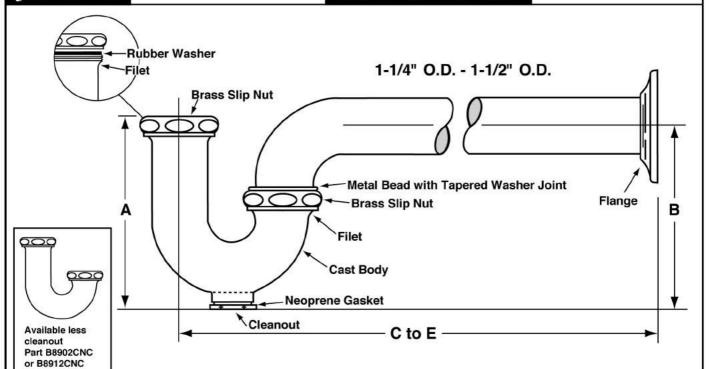

#### STOCK LINE

92	ROUGHING MEASUREMENTS							
	TRAP DI	0.40						
NO.	INLET	OUTLET	A	В	C to E			
B8902C	1-1/4"	1-1/2"	5"	5-1/2"	10-1/2"			

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**B8902CNC** 

Cast Body P-Trap With or Without Cleanout

#### Job Name:

### **Submittal Number:**

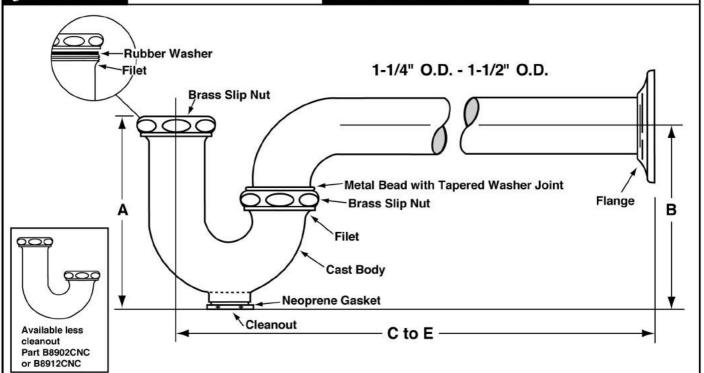

	ROUGHING MEASUREMENTS							
	TRAP DI	MENSIONS			C to E			
NO.	INLET	OUTLET	A	В				
B8902CNC	1-1/4"	1-1/2"	4-3/4"	4-1/2"	10-1/2"			

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Available less

cleanout Part B8902CNC or B8912CNC

## McGuire Manufacturing Co., Inc. 60 Grandview Court

Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

B8912

With or Without Cleanout

Part No.

Cast Body P-Trap

### PRODUCT SPECIFICATION

**Submittal Number:** Job Name: Rubber Washer 1-1/4" O.D. - 1-1/2" O.D. Filet **Brass Slip Nut** Metal Bead with Tapered Washer Joint Flange **Brass Slip Nut** Filet Cast Body Neoprene Gasket Cleanout

#### STOCK LINE

C to E -

	ROUGHING MEASUREMENTS							
	TRAP DI	0 #C0	_					
NO.	INLET	OUTLET	A	В	C to E			
B8912	1-1/2"	1-1/2"	5"	4-1/2"	10-1/2"			

FED SPEC W.W.P. 541 **CAST BRASS P TRAP** MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813


customerservice@mcguiremfg.com mcguiremfg.com

**B8912C** 

Part No.

**Cast Body P-Trap** 

PRODUCT SPECIFICATION With or Without Cleanout **Submittal Number:** Job Name:

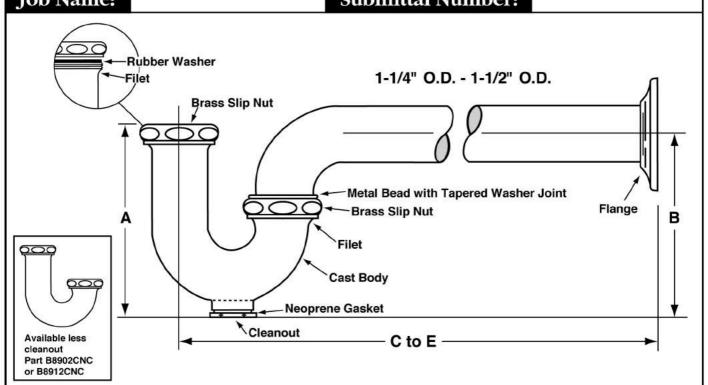

	ROUGHING MEASUREMENTS							
	TRAP DI	e 8 <b>#</b> Co		10-00-00-00-00-0				
NO.	INLET	OUTLET	A	В	C to E			
B8912C	1-1/2"	1-1/2"	5"	4-1/2"	10-1/2"			

FED SPEC W.W.P. 541 **CAST BRASS P TRAP** MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

### PRODUCT SPECIFICATION


Part No.

**B8912CNC** 

Cast Body P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

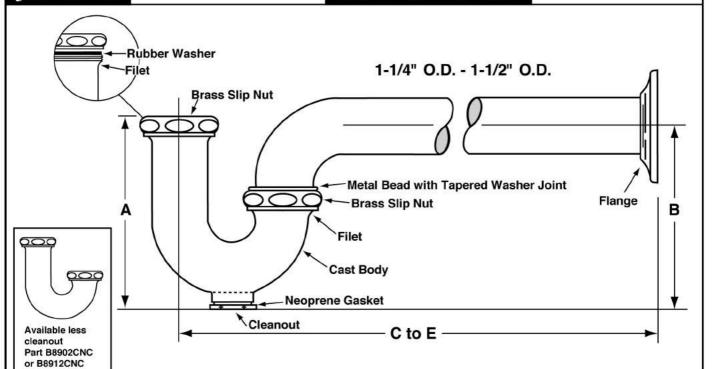

#### STOCK LINE

ROUGHING MEASUREMENTS							
	TRAP DI	MENSIONS		В	C to E		
NO.	INLET	OUTLET	_ A				
B8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8"	10-1/2"		

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

Part No.


C8872

## PRODUCT SPECIFICATION

**Cast Body P-Trap** With or Without Cleanout

Job Name:

**Submittal Number:** 

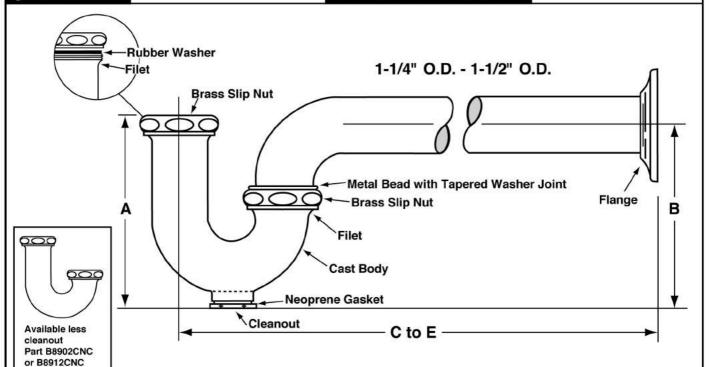

#### STOCK LINE

	ROUGHING MEASUREMENTS							
	TRAP DI	0.40						
NO.	INLET	OUTLET	_ A	В	C to E			
C8872	1-1/4"	1-1/4"	4-1/2"	4-1/4"	10"			

FED SPEC W.W.P. 541 **CAST BRASS P TRAP** MINIMUM SEAL 2"

Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813


customerservice@mcguiremfg.com mcguiremfg.com

Part No.

**C8872CECO** 

Cast Body P-Trap With or Without Cleanout

#### PRODUCT SPECIFICATION

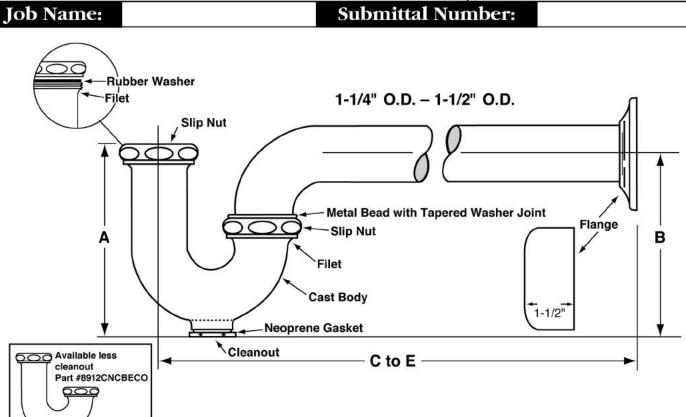

#### **ECO-LINE**

ROUGHING MEASUREMENTS									
MODEL NO	TRAP DIMENSIONS								
MODEL NO.	INLET	OUTLET	7 <b>A</b>	В	CtoE	FLANGE	SLIP NUT		
C8872CECO	1-1/4"	1-1/4"	4-1/2"	4-1/2"	10"	Shallow	Zinc		

FED SPEC W.W.P. 541 **CAST BRASS P-TRAP** MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

Part No.


C8902

Cast Body P-Trap With or Without Cleanout

#### PRODUCT SPECIFICATION

Job Name:

**Submittal Number:** 

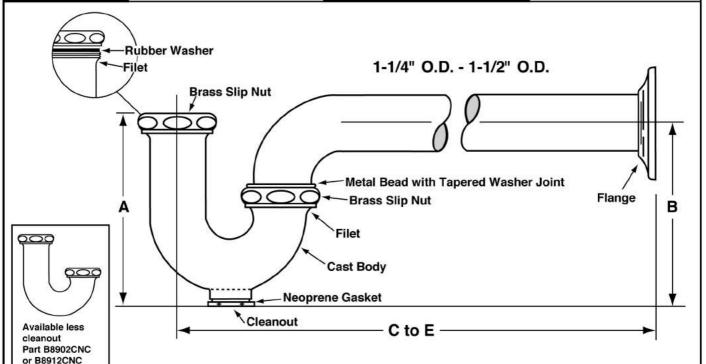

#### STOCK LINE

	ROUGHING MEASUREMENTS								
	TRAP DI	o 0.400							
NO.	INLET	OUTLET	A	В	C to E				
C8902	1-1/4"	1-1/2"	5"	5-1/2"	10-1/2"				

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

C8912

Cast Body P-Trap With or Without Cleanout

#### Job Name:

## **Submittal Number:**

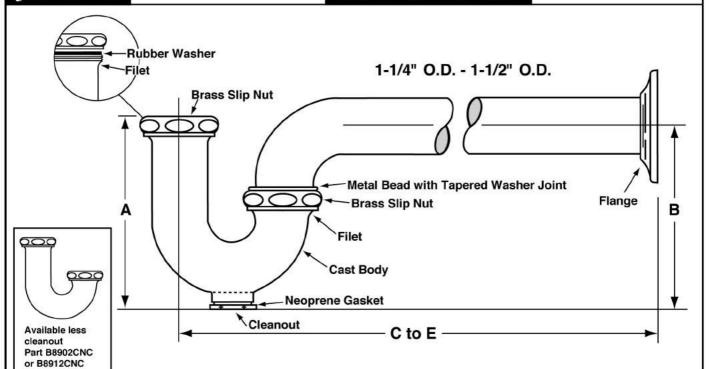

#### STOCK LINE

	ROUGHING MEASUREMENTS								
	TRAP DI	9 V <b>#</b> Ch							
NO.	INLET	OUTLET	A	В	C to E				
C8912	1-1/2"	1-1/2"	5"	4-1/2"	10-1/2"				

FED SPEC W.W.P. 541 **CAST BRASS P TRAP** 

MINIMUM SEAL 2"

Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**C8912CECO** 

Cast Body P-Trap With or Without Cleanout

Job Name:

### **Submittal Number:**

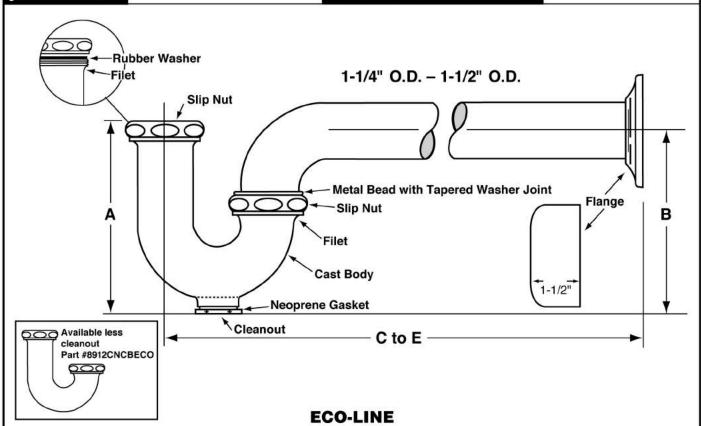

ROUGHING MEASUREMENTS									
MODEL NO.	TRAP DIMENSIONS			=					
	INLET	OUTLET	A	В	CtoE	FLANGE	SLIP NUT		
C8912CECO	1-1/2", 1-1/4"	1-1/2"	5"	5"	10-1/2"	Shallow	Zinc		

FED SPEC W.W.P. 541 CAST BRASS P-TRAP MINIMUM SEAL 2"



ASME A112.18.2/CSA B125.2

## **Specifications:**

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com


## PRODUCT SPECIFICATION

Part No.

**MCT125 Series** 

Lite Commercial 17 GA Tubular P-Trap

## Job Name: Submittal Number:

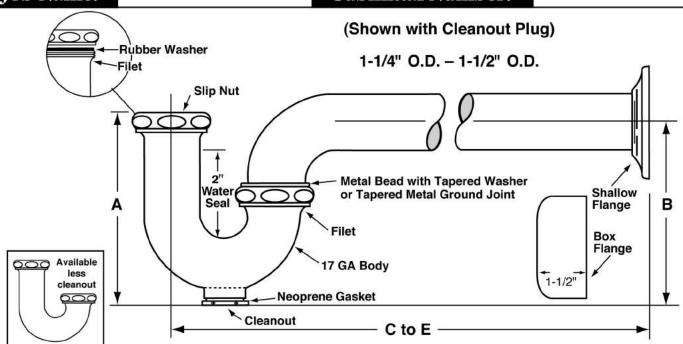

#### LITE COMMERCIAL ADJUSTABLE 17 GAUGE TUBULAR P-TRAPS

Roughing Measurements							
Model No.	INLET	OUTLET	A	В	C to E	Flange	Slip Nut
MCT125085	1-1/4"	1-1/4"	5"	4-1/2"	11-1/2"	Shallow	Brass
MCT125085B	1-1/4"	1-1/4"	5-1/4"	4-1/2"	11-1/2"	Вох	Brass
MCT125085NC	1-1/4"	1-1/4"	5"	5"	11-1/2"	Shallow	Brass
MCT125085NCB	1-1/4"	1-1/4"	5"	4-5/8"	11-1/2"	Box	Brass
MCT125075ZN	1-1/4"	1-1/4"	5-1/4"	4-3/4"	10-1/2"	Shallow	Zinc
MCT125075NCZN	1-1/4"	1-1/4"	5"	4-1/2"	10-1/2"	Shallow	Zinc

#### **Suffix Designations**

NC = No Cleanout Plug

GJ = Ground Joint Wall Bend

## **Specifications:**

P-Trap shall be 17 gauge seamless chrome plated tubular brass with wall bend and flange.



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

ASME A112.18.2/CSA B125.2



60 Grandview Court Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com


## PRODUCT SPECIFICATION

Part No.

**MCT150 Series** 

Lite Commercial 17 GA **Tubular P-Trap** 

### **Submittal Number:**

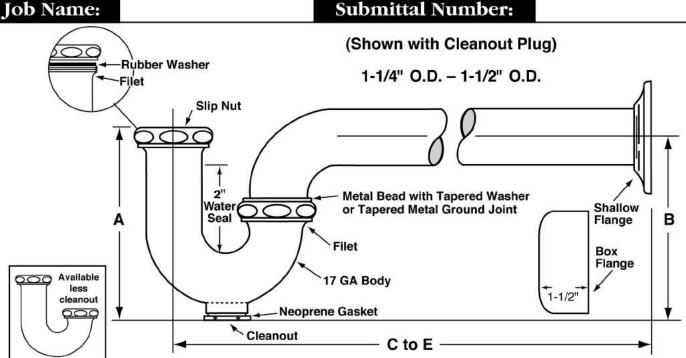

#### LITE COMMERCIAL ADJUSTABLE 17 GAUGE TUBULAR P-TRAPS

Roughing Measurements							
Model No.	INLET	OUTLET	A	В	C to E	Flange	Slip Nut
MCT150090B	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	12"	Box	Brass
MCT150075ZN	1-1/2", 1-1/4"	1-1/2"	5-1/2"	5"	10-1/2"	Shallow	Zinc
MCT150075NCZN	1-1/2", 1-1/4"	1-1/2"	5"	4-3/4"	11"	Shallow	Zinc
MCT150090NCB	1-1/2", 1-1/4"	1-1/2"	5-1/4"	4-1/2"	12-1/4"	Box	Brass
MCT150090NCGJB	1-1/2", 1-1/4"	1-1/2"	5-1/4"	4-3/4"	12-1/4"	Box	Brass
MCT150090NCGJ	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	12-1/4"	Shallow	Brass
MCT150150B	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	18"	Box	Brass

#### **Suffix Designations**

NC = No Cleanout Plug

GJ = Ground Joint Wall Bend



#### ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be 17 gauge seamless chrome plated tubular brass with wall bend and flange.





60 Grandview Court Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com


## PRODUCT SPECIFICATION

Part No.

MCT150UTL17B

17GA P-Trap Adjustable Milwaukee Style, N.Y. Utility Style

Job Name: Submittal Number:

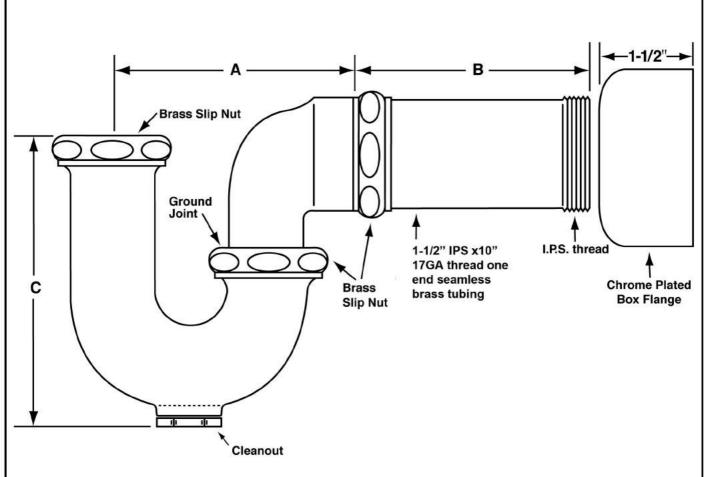

	ROUGHING MEASUREMENTS									
	i.									
NO.	INLET	OUTLET	A	С						
MCT150UTL17B	1-1/4" x 1-1/2", 1-1/2"	1-1/2" x 10" Slip x I.P.S. 17 G.A. T.O.E. Brass Tube	4-1/4"	10"	5"					



ASME A112.18.2/CSA B125.2

## **Specifications:**

P-Trap shall be 17 GA seamless tubular chrome plated brass with 17 GA utility arm and flange.





Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

**Options for P-Traps** 

Part No.

Job Name:

**Submittal Number:** 

#### CAST BODY P-TRAP OPTIONS

#### **WALL BEND OPTIONS-**

Add suffix to part number.

**15** – 15" C to E (1-1/4" and 1-1/2" only)

18 - 18" C to E (1-1/4" and 1-1/2" only)

GJ - Ground joint wallbend Custom sizes available.



Add suffix to part number.


- Forged Brass, set screw, chrome plated

**DF** - Deep Flange, (bell type) chrome plated brass

SDF - Deep Flange, (bell type) chrome plated steel

B - Box Flange, chrome plated wrought steel

BF - Box Flange, chrome plated brass



#### STANDARD FINISH OPTIONS-Add suffix to part number.

C - Polished Chrome

S - Satin Chrome

Custom finishes available.

Options available for McGuire "Classic" Professional Line only.



Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**V8089C** 

Vandal Resistant Ground Joint Swivel P-Trap With or Without Cleanout

#### Job Name:

## **Submittal Number:**

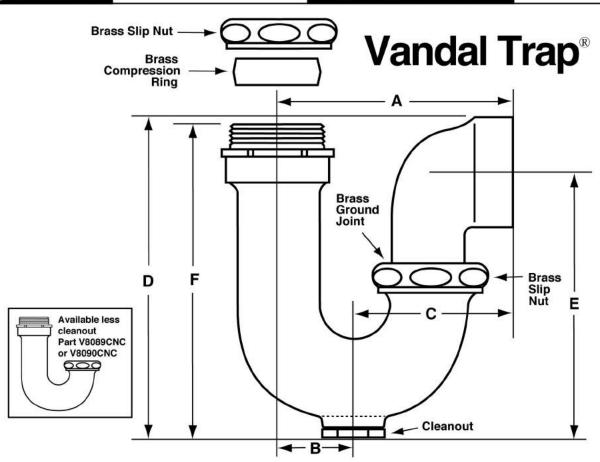

	ROUGHING MEASUREMENTS								
	TRAP DIMENSIONS		_				_	_	
NO.	INLET	OUTLET	A	В	C	D	E	F	
V8089C	1-1/2" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5-1/2"	

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

See options and accessories section for details on product variations.



ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable ground joint swivel P-Trap, vandal resistent, with cleanout. Furnished with cast brass J-Bend with or without cleanout, cast brass slip nuts, heavy brass vandal inlet and cast brass elbow. Trap shall be certified by CSA or other recognized testing authority and shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com


## PRODUCT SPECIFICATION

Part No.

**V8089CNC** 

Vandal Resistant Ground Joint Swivel P-Trap With or Without Cleanout

Job Name: Submittal Number:

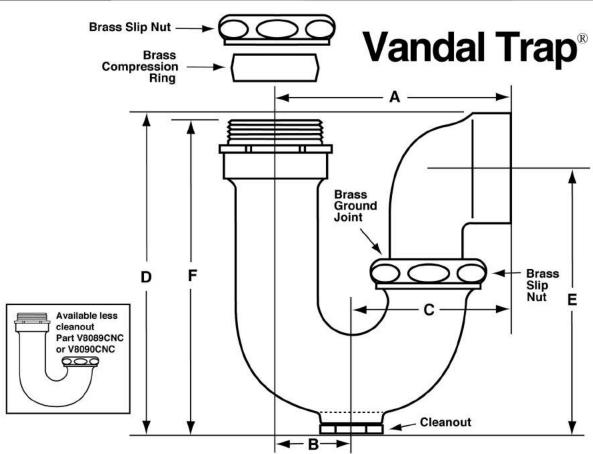

ROUGHING MEASUREMENTS								
NO	TRAP DIMENSIONS			_		_	_	
NO.	INLET	OUTLET	A	В	C	D	<u>.</u>	
V8089CNC	1-1/2" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	5-1/8"

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

See options and accessories section for details on product variations.



ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable ground joint swivel P-Trap, vandal resistent, with cleanout. Furnished with cast brass J-Bend with or without cleanout, cast brass slip nuts, heavy brass vandal inlet and cast brass elbow. Trap shall be certified by CSA or other recognized testing authority and shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

**V8090C** 

Vandal Resistant Ground Joint Swivel P-Trap With or Without Cleanout

Job Name:

**Submittal Number:** 

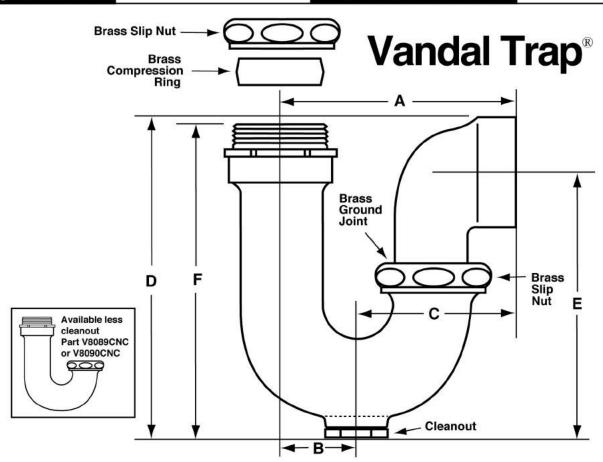

	ROUGHING MEASUREMENTS								
	TRAP DIMENSIONS		_				_	_	
NO.	INLET	OUTLET	A	В	G	D	E		
V8090C	1-1/4" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5-1/2"	

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

See options and accessories section for details on product variations.



ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable ground joint swivel P-Trap, vandal resistent, with cleanout. Furnished with cast brass J-Bend with or without cleanout, cast brass slip nuts, heavy brass vandal inlet and cast brass elbow.

Trap shall be certified by CSA or other recognized testing authority and shall bear manufacturer and testing mark.





Cheshire, Connecticut 06410

(203) 699-1801 Fax (203) 699-1813 customerservice@mcguiremfg.com mcguiremfg.com

## PRODUCT SPECIFICATION


Part No.

## **V8090CNC**

Vandal Resistant Ground Joint Swivel P-Trap With or Without Cleanout

Job Name:

Submittal Number:

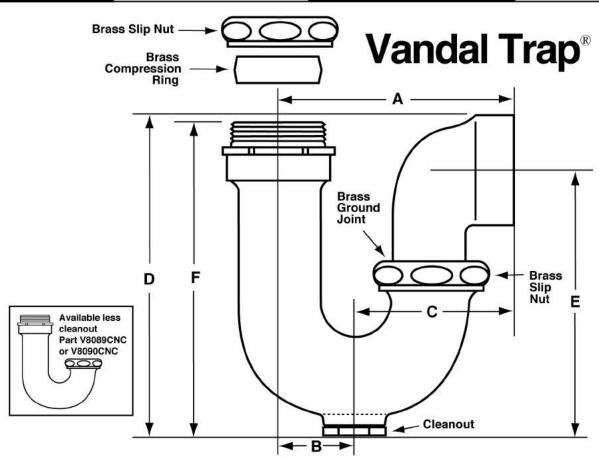

ROUGHING MEASUREMENTS								
	TRAP DIMENSIONS						_	_
NO.	INLET	OUTLET	A	В	C	D	<b>.</b>	F
V8090CNC	1-1/4" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	5-1/8"

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"

See options and accessories section for details on product variations.



ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable ground joint swivel P-Trap, vandal resistent, with cleanout. Furnished with cast brass J-Bend with or without cleanout, cast brass slip nuts, heavy brass vandal inlet and cast brass elbow.

Trap shall be certified by CSA or other recognized testing authority and shall bear manufacturer and testing mark.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

PRODUCT SPECIFICATION


Part No.

Vandal Resistant P-Trap With or Without Cleanout

Job Name:

Submittal Number:

# Vandal Trap®

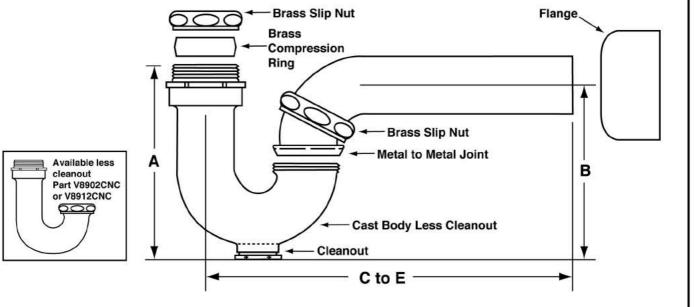

ROUGHING MEASUREMENTS							
NO.	TRAP DIMENSIONS	A	В	C to E			
V8902C	1-1/4" Inlet x 1-1/2" - 17 G.A.	6"	4-3/4"	12"			

FED SPEC W.W.P. 541 CAST BRASS P TRAP **MINIMUM SEAL 2"** 



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable P-Trap, vandal resistant, with cleanout. Furnished with polished and chrome plated cast J-Bend without cleanout, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

PRODUCT SPECIFICATION


Part No.

Vandal Resistant P-Trap With or Without Cleanout

Job Name:

Submittal Number:

# Vandal Trap®

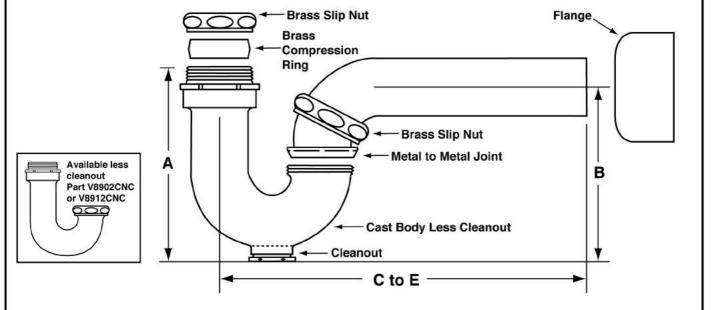

	ROUGHING MEASUREMENTS							
NO.	TRAP DIMENSIONS	A	В	C to E				
V8902CNC	1-1/4" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"				

FED SPEC W.W.P. 541 CAST BRASS P TRAP **MINIMUM SEAL 2"** 



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable P-Trap, vandal resistant, with cleanout. Furnished with polished and chrome plated cast J-Bend without cleanout, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com


#### PRODUCT SPECIFICATION

Part No.

Vandal Resistant P-Trap With or Without Cleanout

Submittal Number: Job Name:

# Vandal Trap®

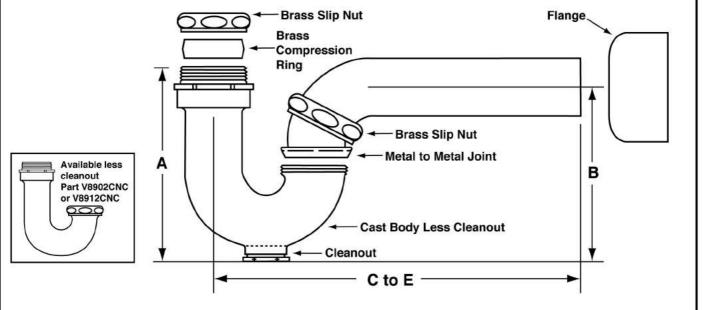

ROUGHING MEASUREMENTS						
NO.	TRAP DIMENSIONS	Α	В	C to E		
V8912C	1-1/2" Inlet x 1-1/2" - 17 G.A.	6"	4-3/4"	12"		

FED SPEC W.W.P. 541 CAST BRASS P TRAP **MINIMUM SEAL 2"** 



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable P-Trap, vandal resistant, with cleanout. Furnished with polished and chrome plated cast J-Bend without cleanout, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.





60 Grandview Court Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813

customerservice@mcguiremfg.com mcguiremfg.com

#### PRODUCT SPECIFICATION

Vandal Resistant P-Trap
With or Without Cleanout


Part No.

V8912CNC

Job Name:

**Submittal Number:** 

# Vandal Trap®

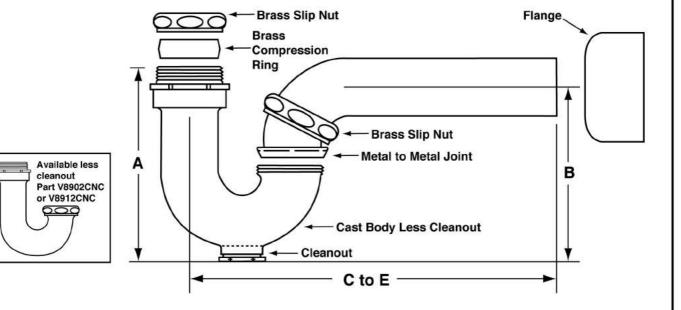

ROUGHING MEASUREMENTS						
NO.	TRAP DIMENSIONS	Α	В	C to E		
V8912CNC	1-1/2" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"		

FED SPEC W.W.P. 541
CAST BRASS P TRAP
MINIMUM SEAL 2"



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

## **Specifications:**

Cast brass chrome plated adjustable P-Trap, vandal resistant, with cleanout. Furnished with polished and chrome plated cast J-Bend without cleanout, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.

