

		ROUGHIN	G MEASU	JREMEN	NTS			0.0
No	TRAP D	IMENSIONS	26 27				527.2	-
NO.	INLET	OUTLET	Α	B	С	D	E	F
201	1-1/4"	I.P.S 1-1/2"	4-3/4"	1-1/4"	3-1/4"	4-3/4"	4"	3-7/8"
202	1-1/2"	I.P.S 1-1/2"	4-3/4"	1-1/4"	3-1/4"	4-3/4"	4"	3-7/8"
204	1-1/2"	I.P.S 2"	5-5/16"	1-3/4"	3-9/16"	6-3/8"	5"	4-7/8"
205	2"	I.P.S 2"	5-5/16"	1-3/4"	3-9/16"	6-3/8"	5"	4-7/8"


See options and accessories section for details on product variations.

Specifications:

P-Trap shall be chrome plated cast brass with cleanout, female IPS outlet, and cast brass slip nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall be McGuire (201, 202, 204, 205).



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P6gWarnings.ca.gov.

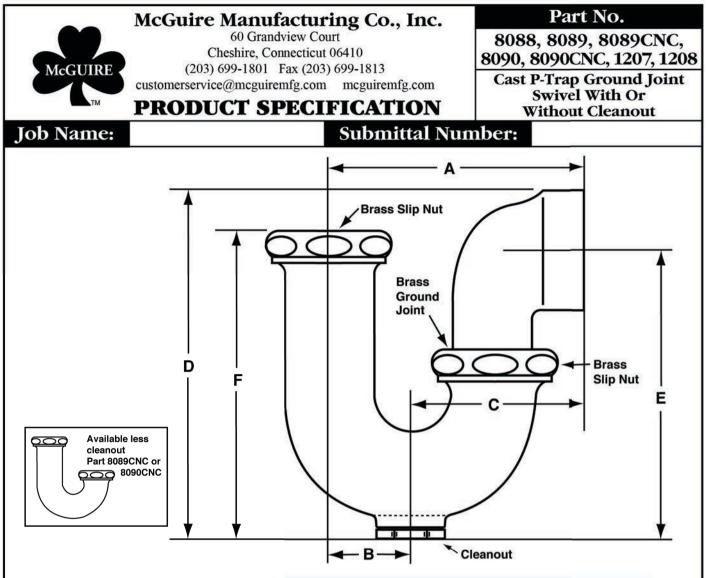

	ROUGHING MEASUREMENTS										
NO	TRAP DI	MENSIONS			•		-	_			
NO.	INLET	OUTLET	A	В	С	D	E	F			
8088	1-1/4" x 1-1/4"	IPS 1-1/4"	4-3/16"	1-1/4"	2-15/16"	5-1/2"	4-1/2"	5"			
8089	1-1/2" x 1-1/2"	IPS 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5"			
8089CNC	1-1/2" x 1-1/2"	IPS 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	4-5/8"			
8090	1-1/4" x 1-1/2"	IPS 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5"			
8090CNC	1-1/4" x 1-1/2"	IPS 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	4-5/8"			
1207	1-1/2"	IPS 2"	5-3/8"	1-3/4"	3-5/8"	6-5/8"	5-1/4"	5-1/16"			
1208	2"	IPS 2"	5-3/8"	1-3/4"	3-5/8"	6-5/8"	5-1/4"	5-1/16"			

See options and accessories section for details on product variations.


Specifications:

P-Trap shall be chrome plated cast brass body (with, without) cleanout, cast brass ground joint elbow and cast brass slip nut. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall be McGuire (8088, 8089, 8090, 1207, 1208). Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.





ASME A112.18.2/CSA B125.2

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

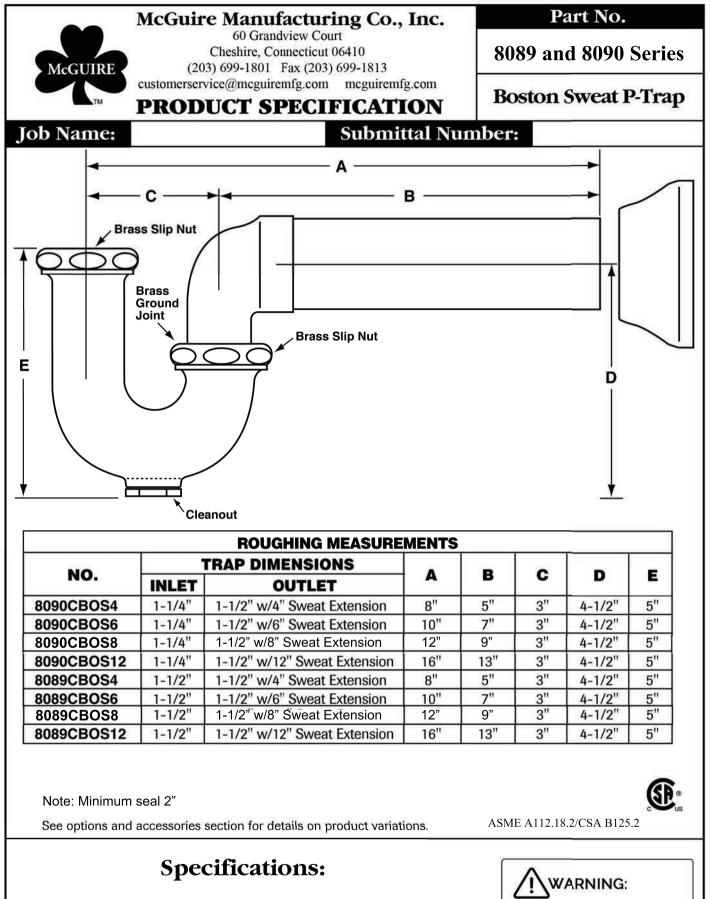

P-Trap shall be chrome plated cast brass body with cleanout, 17 gauge seamless tubular sweat extension, cast brass ground joint elbow, and cast brass slip nuts. No reducing washers. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.




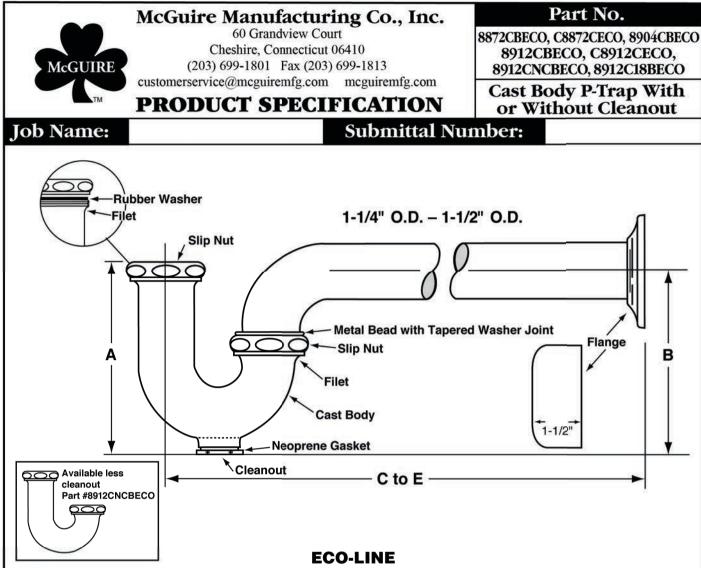

ROUGHING MEASUREMENTS										
	TRAP DIM	IENSIONS								
MODEL NO.	INLET	OUTLET	A	В	C to E	FLANGE	SLIP NUT			
8872CBECO	1-1/4"	1-1/4"	4-1/2"	4-1/2″	11″	Box	Brass			
C8872CECO	1-1/4"	1-1/4"	4-1/2"	4-1/2"	10"	Shallow	Zinc			
8904CBECO	1-1/2", 2"	2"	5"	6"	13-1/2"	Box	Brass			
8912CBECO	1-1/2", 1-1/4"	1-1/2"	5"	5″	12"	Box	Brass			
C8912CECO	1-1/2", 1-1/4"	1-1/2"	5"	5″	10-1/2″	Shallow	Zinc			
8912CNCBECO	1-1/2", 1-1/4"	1-1/2"	4-3/4"	4-1/2"	12"	Box	Brass			
8912C18BECO	1-1/2", 1-1/4"	1-1/2"	5"	5″	18"	Box	Brass			


Specifications:

Chrome plated P-Trap shall be cast brass body, with or without cleanout, with 17 gauge seamless tubular wall bend and flange.



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P6gWarnings.ca.gov.

WARNING:

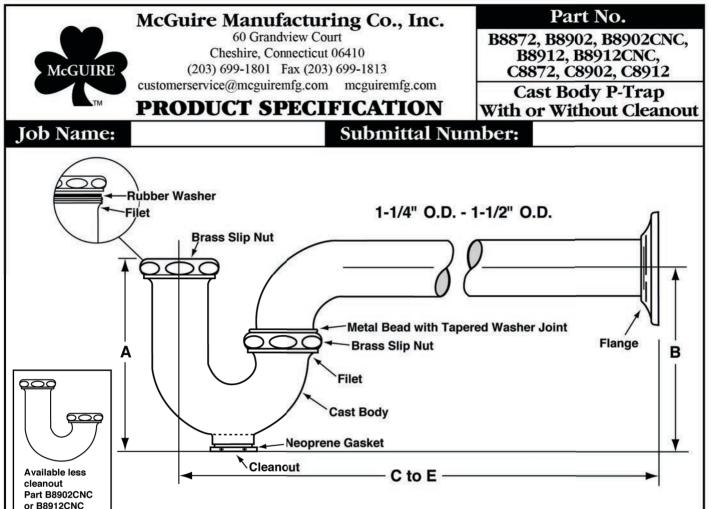

STOCK LINE

	ROUGHING MEASUREMENTS									
	TRAP DI	MENSIONS	_	_	5 22					
NO.	INLET	OUTLET	- A	В	C to E					
B8872	1-1/4"	1-1/4"	4-1/2"	4-1/2"	10-1/2"					
C8872	1-1/4"	1-1/4"	4-1/2"	4-1/4"	10"					
B8902	1-1/4"	1-1/2"	5"	5-1/2"	10-1/2"					
B8902CNC	1-1/4"	1-1/2"	4-3/4"	4-1/2"	10-1/2"					
C8902	1-1/4"	1-1/2"	5"	5-1/2"	10-1/2"					
B8912	1-1/2"	1-1/2"	5"	4-1/2"	10-1/2"					
B8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8"	10-1/2"					
C8912	1-1/2"	1-1/2"	5"	4-1/2"	10-1/2"					

FED SPEC W.W.P. 541 CAST BRASS P TRAP MINIMUM SEAL 2"


Note: Prefix "C" indicates die cast slip nuts.



See options and accessories section for details on product variations.


Specifications:

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall bear manufacturer and testing mark.



ASME A112.18.2/CSA B125.2

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

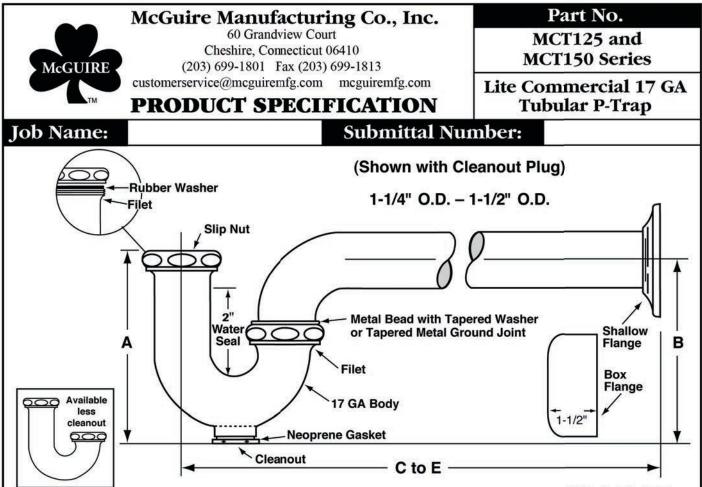

LITE COMMERCIAL ADJUSTABLE 17 GAUGE TUBULAR P-TRAPS

Roughing Measurements				-			
Model No.	INLET	OUTLET	A	В	C to E	Flange	Slip Nut
MCT125085	1-1/4"	1-1/4"	5"	4-1/2"	11-1/2"	Shallow	Brass
MCT125085B	1-1/4"	1-1/4"	5-1/4"	4-1/2"	11-1/2"	Box	Brass
MCT125085NC	1-1/4"	1-1/4"	5"	5"	11-1/2"	Shallow	Brass
MCT125085NCB	1-1/4"	1-1/4"	5"	4-5/8"	11-1/2"	Box	Brass
MCT125075ZN	1-1/4"	1-1/4"	5-1/4"	4-3/4"	10-1/2"	Shallow	Zinc
MCT125075NCZN	1-1/4"	1-1/4"	5"	4-1/2"	10-1/2"	Shallow	Zinc
MCT150090B	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	12"	Box	Brass
MCT150075ZN	1-1/2", 1-1/4"	1-1/2"	5-1/2"	5"	10-1/2"	Shallow	Zinc
MCT150075NCZN	1-1/2", 1-1/4"	1-1/2"	5"	4-3/4"	11"	Shallow	Zinc
MCT150090NCB	1-1/2", 1-1/4"	1-1/2"	5-1/4"	4-1/2"	12-1/4"	Box	Brass
MCT150090NCGJB	1-1/2", 1-1/4"	1-1/2"	5-1/4"	4-3/4"	12-1/4"	Box	Brass
MCT150090NCGJ	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	12-1/4"	Shallow	Brass
MCT150150B	1-1/2", 1-1/4"	1-1/2"	5-1/4"	5"	18"	Box	Brass

Suffix Designations

Specifications:

P-Trap shall be 17 gauge seamless chrome plated tubular brass with wall bend and flange.




ASME A112.18.2/CSA B125.2



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P6gWarnings.ca.gov.

NC = No Cleanout Plug

GJ = Ground Joint Wall Bend

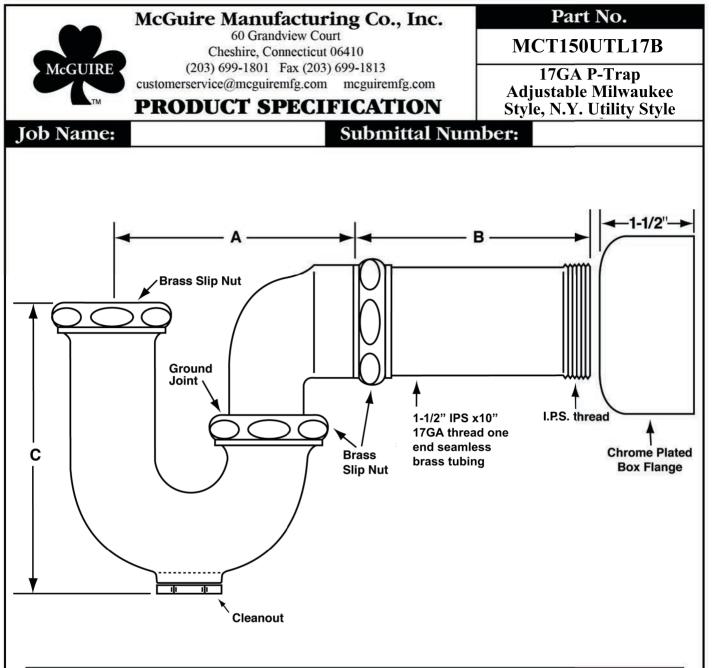

		ROUGHING MEASUREMENTS			
	•	TRAP DIMENSIONS		-	
NO.	INLET	OUTLET	A	B	С
MCT150UTL17B	1-1/4" x 1-1/2", 1-1/2"	1-1/2" x 10" Slip x I.P.S. 17 G.A. T.O.E. Brass Tube	4-1/4"	10"	5"
					122274.8



Specifications:

P-Trap shall be 17 GA seamless tubular chrome plated brass with 17 GA utility arm and flange.



This product can expose you to chemicals including lead which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

© 2019 McGuire Manufacturing Co., Inc. All rights reserved / I Traps / www.mcguiremfg.com

	McGuire Manufacturing Co., Inc. 60 Grandview Court	Part No.
McGUIRE	Cheshire, Connecticut 06410 (203) 699-1801 Fax (203) 699-1813	
	customerservice@mcguiremfg.com PRODUCT SPECIFICATION	Options for P-Traps
ob Name:	Submittal Num	ber:

CAST BODY P-TRAP OPTIONS

WALL BEND OPTIONS-


Add suffix to part number.

- **15** 15" C to E (1-1/4" and 1-1/2" only)
- **18** 18" C to E (1-1/4" and 1-1/2" only)
- **GJ** Ground joint wallbend Custom sizes available.

FLANGE OPTIONS-

Add suffix to part number.

- F Forged Brass, set screw, chrome plated
- DF Deep Flange, (bell type) chrome plated brass
- SDF Deep Flange, (bell type) chrome plated steel
- B Box Flange, chrome plated wrought steel
- BF Box Flange, chrome plated brass




STANDARD FINISH OPTIONS-

Add suffix to part number.

- C Polished Chrome
- **S** Satin Chrome Custom finishes available.

Options available for McGuire "Classic" Professional Line only.

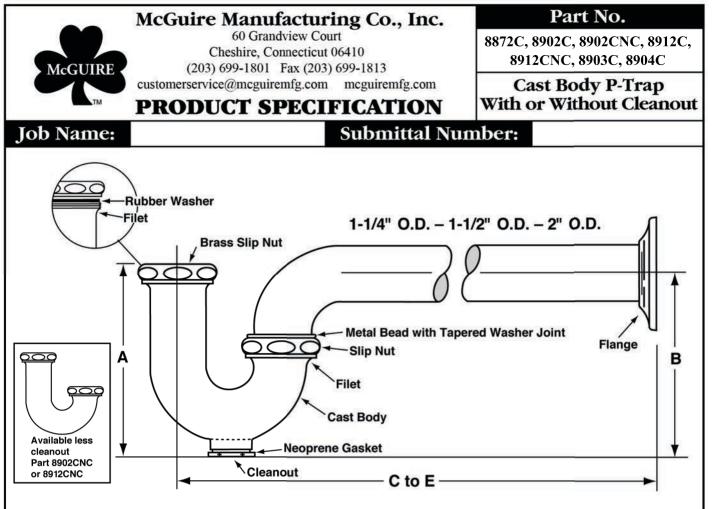

PROFESSIONAL LINE

	ROUGHING MEASUREMENTS									
	TRAP DIM	ENSIONS		-						
NO.	INLET	OUTLET	A	В	C to E					
8872C	1-1/4"	1-1/4"	4-1/2"	4-1/4"	11-1/2"					
8902C	1-1/4"	1-1/2"	5"	5-1/2"	11-1/2"					
8902CNC	1-1/4"	1-1/2"	4-5/8"	4-3/4"	11-1/2"					
8912C	1-1/2"	1-1/2"	5"	5-1/2"	11-1/2"					
8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8″	11-1/2"					
8903C	1-1/2"	2"	5"	6"	13-3/4"					
8904C	2"	2"	5"	6"	13-3/4"					

FED SPEC W.W.P. 541 CAST BRASS P TRAP MINIMUM SEAL 2"

See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125-2


Specifications:

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange.


P-Trap shall be McGuire "Classic" Professional Line

Trap shall be certified by CSA or other recognized testing authority. Trap shall bear manufacturer and testing marks.





This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

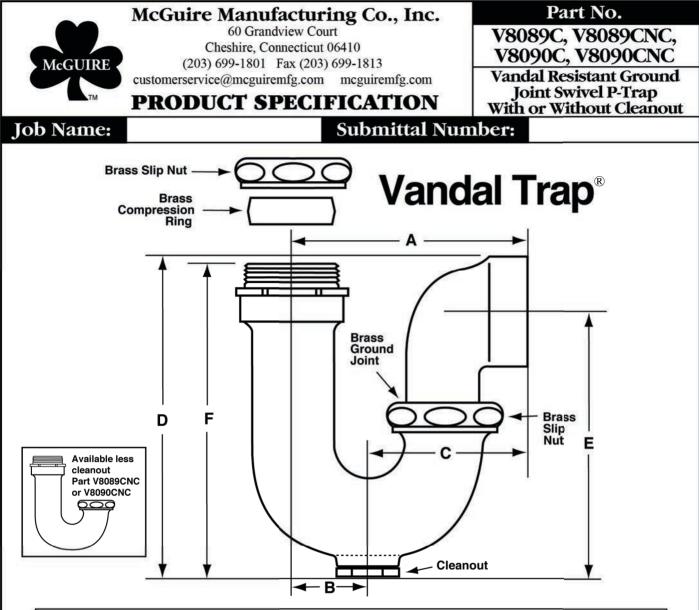

	ROUGHING MEASUREMENTS											
	TRAP DIME	NSIONS		_		-		1.12				
NO.	INLET	OUTLET	A	B	С	D	E					
V8089C	1-1/2" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5-1/2"				
V8089CNC	1-1/2" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	5-1/8"				
V8090C	1-1/4" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/4"	4-5/8"	5-1/2"				
V8090CNC	1-1/4" x 1-1/2"	S.P.S. 1-1/2"	4-1/4"	1-3/8"	2-7/8"	5-3/8"	4-1/4"	5-1/8"				

See options and accessories section for details on product variations.


Specifications:

Cast brass chrome plated adjustable ground joint swivel P-Trap, vandal resistent, with cleanout. Furnished with cast brass J-Bend with or without cleanout, cast brass slip nuts, heavy brass vandal inlet and cast brass elbow. Trap shall be certified by CSA or other recognized testing authority and shall bear manufacturer and testing mark.



ASME A112.18.2/CSA B125.2

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

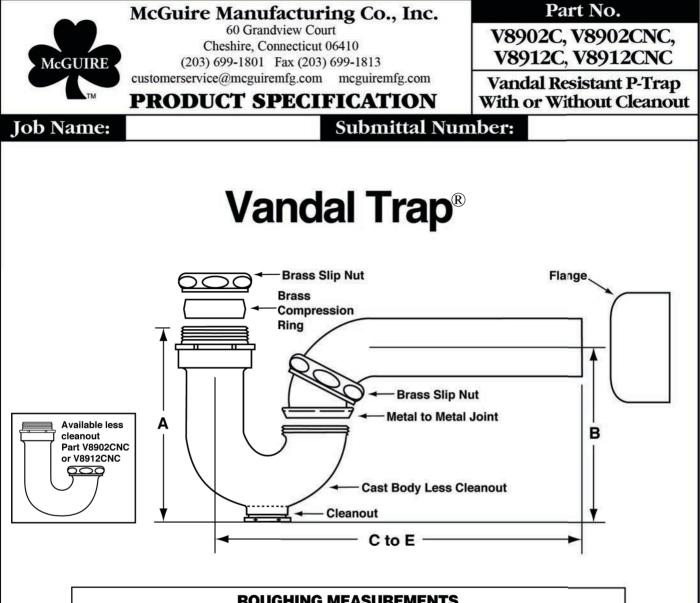

ROUGHING MEASUREMENTS								
NO.	TRAP DIMENSIONS	Α	В	C to E				
V8902C	1-1/4" Inlet x 1-1/2" - 17 G.A.	6"	4-3/4"	12"				
V8902CNC	1-1/4" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"				
V8912C	1-1/2" Inlet x 1-1/2" - 17 G.A.	6″	4-3/4"	12"				
V8912CNC	1-1/2" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"				

See options and accessories section for details on product variations.


ASME A112.18.2/CSA B125.2

Specifications:

Cast brass chrome plated adjustable P-Trap, vandal resistant, with cleanout. Furnished with polished and chrome plated cast J-Bend without cleanout, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.PE5Warnings.ca.gov.

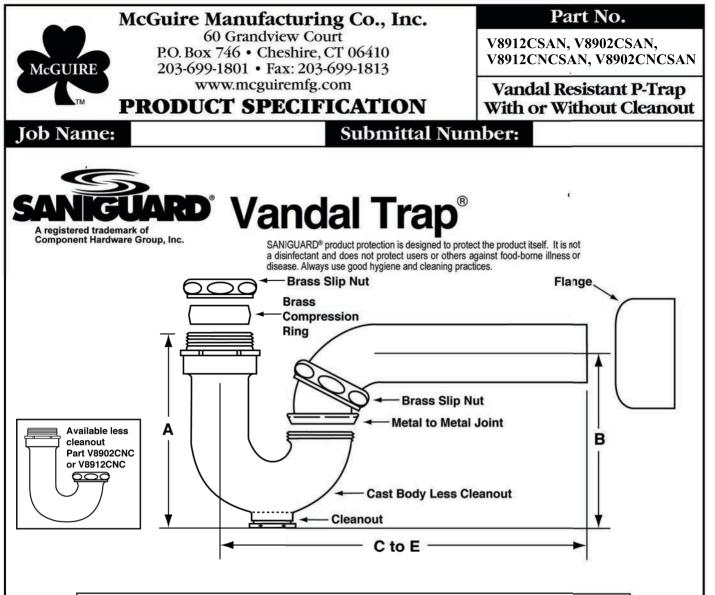

ROUGHING MEASUREMENTS									
NO.	TRAP DIMENSIONS	Α	В	C to E					
V8902CSAN	1-1/4" Inlet x 1-1/2" - 17 G.A.	6"	4-3/4"	12"					
V8902CNCSAN	1-1/4" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"					
V8912CSAN	1-1/2" Inlet x 1-1/2" - 17 G.A.	6″	4-3/4"	12"					
V8912CNCSAN	1-1/2" Inlet x 1-1/2" - 17 G.A.	5-3/4"	4-1/2"	12"					

See options and accessories section for details on product variations.

ASME A112.18.1-2011/CSA B125.2-11

Specifications:

Cast brass chrome plated adjustable P-Trap, vandal resistant, with or without cleanout. Furnished with polished chrome plated cast J-Bend, chrome plated brass slip nuts, heavy brass vandal inlet and outlet connections. Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark. All metal parts shall be treated inside and out with SANIGUARD antimicrobial compound.



This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.